GLEDOPTO

2.4G RF 9W RGBW LED Bulb(R-80)

with 4-zone Touch Screen remote control

Features:

- Soft start,no power peak
- Power off memory
- Easy Installation
- RF 2.4GHz,remote range nearly 30m
- Remote control through internet ,Compatible with wifi bridge
- Vivid colors changing， 9 automatic changing programs
- Two years warranty,CE,RoHS

COPYRIGHT©GLEDOPTO2014-2017
ADD:Floor7,Buliding 1B,Yusheng Industrial Park,Xixiang Street,Bao'an District,Shenzhen
Tel: +86-755-23704292

GLEDOPTO

DIMENSIONS:

Specifications:

- **Name:** 2.4G RF 9W RGBW LED Bulb
- **LED type:** 4PCS 1.5W 5050 SMD LED + 15pcs 0.5W SMD5730
- **Base:** E27/E26/B22
- **Power Rating:** 9W
- **Input Voltage:** AC100-240V
- **CRI:** Ra > 80 (white)
- **Material :** Aluminium housing + PC cover
- **Cover:** milky white
- **Working temp:** -20~60 degrees
- **Life span:** 50,000h
- **Size:** Φ80*H122mm
- **Package:** 80x80x140mm/bulb
  56x26x123mm/remote
- **G.W.:** 0.16kg
- **Remote range:** 30m
- **Programs:** 9 kinds

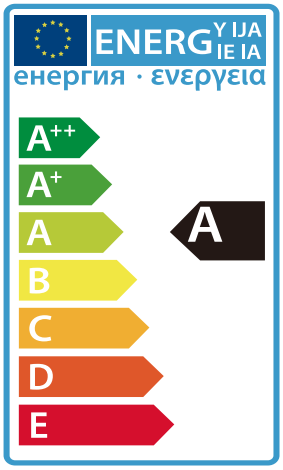

Max 300LM(Cool White)
Max 250LM(Warm White)

COPYRIGHT©GLEDOPTO2014-2017
ADD:Floor7,Buliding 1B,Yusheng Industrial Park,Xixiang Street,Bao'an District,Shenzhen
Tel: +86-755-23704292

GLEDOPTO

Technical Data:

Remote	Size	120X52X20mm
	Working voltage	3V (AAAX2)
	Radio frequency	2400-2483.5MHz
	Modulation mode	GFSK
	Emission power	6db
	Standby power consumption	5uA
	Material	ABS
	Fabrication processing	Multicolor printing & UV varnish
Bulb	Size	122x80mm
	LED Power	7.5W(white)+6W RGB
	Working Temp	- 20°C~60°C
	LED Quantity	1.5W RGB SMD5050 4pcs,0.5W SMD 5730 15pcs
	LED Type	1.5W RGB SMD5050,0.5W SMD 5730
	LED Wavelength	R 620nm;G 510nm;B 460nm

Spectrum Curve & Distribution Curve

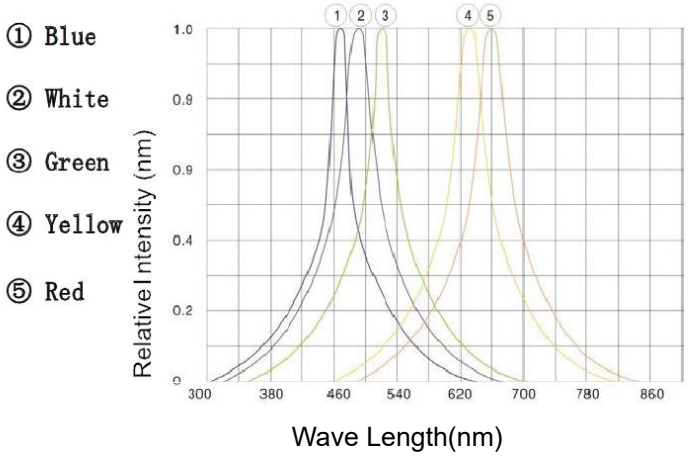

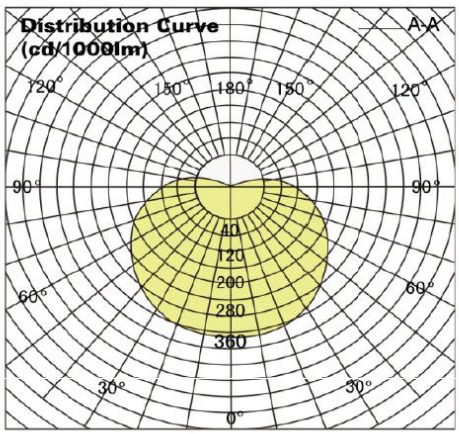

COPYRIGHT©GLEDOPTO2014-2017
ADD:Floor7,Buliding 1B,Yusheng Industrial Park,Xixiang Street,Bao'an District,Shenzhen
Tel: +86-755-23704292

GLEDOPTO

Application:

Light Effect:

COPYRIGHT©GLEDOPTO2014-2017
ADD:Floor7,Buliding 1B,Yusheng Industrial Park,Xixiang Street,Bao'an District,Shenzhen
Tel: +86-755-23704292

Package information:

Qty:LED bulb 1PCS
Size:80×80×140mm
GW:0.16Kg

Qty:remotecontrol 1PCS
Size:56×26×123mm
GW:0.08Kg